


## RRSQUARE Bracket kit Installation instructions

Replace one bracket at a time, new bracket is to replace existing bracket in the same position.

1. Remove old rear bracket and replace with new RRSQUARE rear bracket (the shorter of the 2 brackets) in same position as the original rear bracket in the following order:


- Bolt (*Shown at the bottom on the Diagram*)
- Black washer
- Bracket
- Bar
- Nut

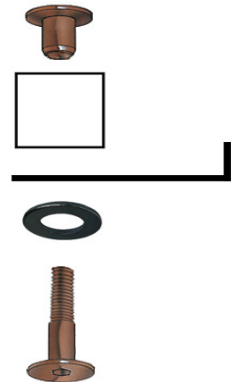

2. Slightly tighten bracket so rear edge of bracket is flush with outside of bar.

3. Remove old front bracket and replace new RRSQUARE front bracket (the longer of the 2 brackets) in same position as the original front bracket in the following order:

- Bolt (*Shown at the top on the Diagram*)
- Black Washer
- Bracket
- Bar
- Nut

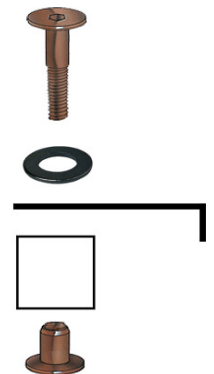


4. Slightly tighten bracket so rear edge of bracket is flush with outside of bar.

5. Remove old lock bar and replace new RRSQUARE lock bar in same position with the existing lock bar in the following order:

- Bolt (*Shown at the bottom on the Diagram*)
- Red washer
- Lock Bar
- Red washer
- Bar
- Nut

Place 2 drops of thread locker in the nut prior to installation

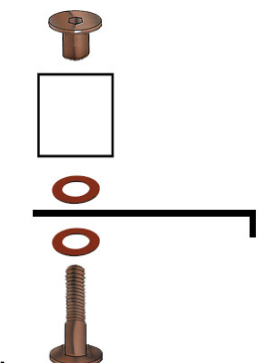

6. Slightly tighten Lock bar so it is firm, but can still rotate. Leave overnight to dry.

7. Install bar onto roof racks to get the brackets to sit at the correct angle on the bar. Once brackets are sitting flush with the roof rack bar. Tighten both brackets.

8. Test bar on roof racks for a snug fit. Move brackets in if too loose, move brackets out if too tight.